







山东汇泉厨业有限公司

援非盟非洲疾病预防控制中心总部（一期）项目

厨房设备

2022年5月18日



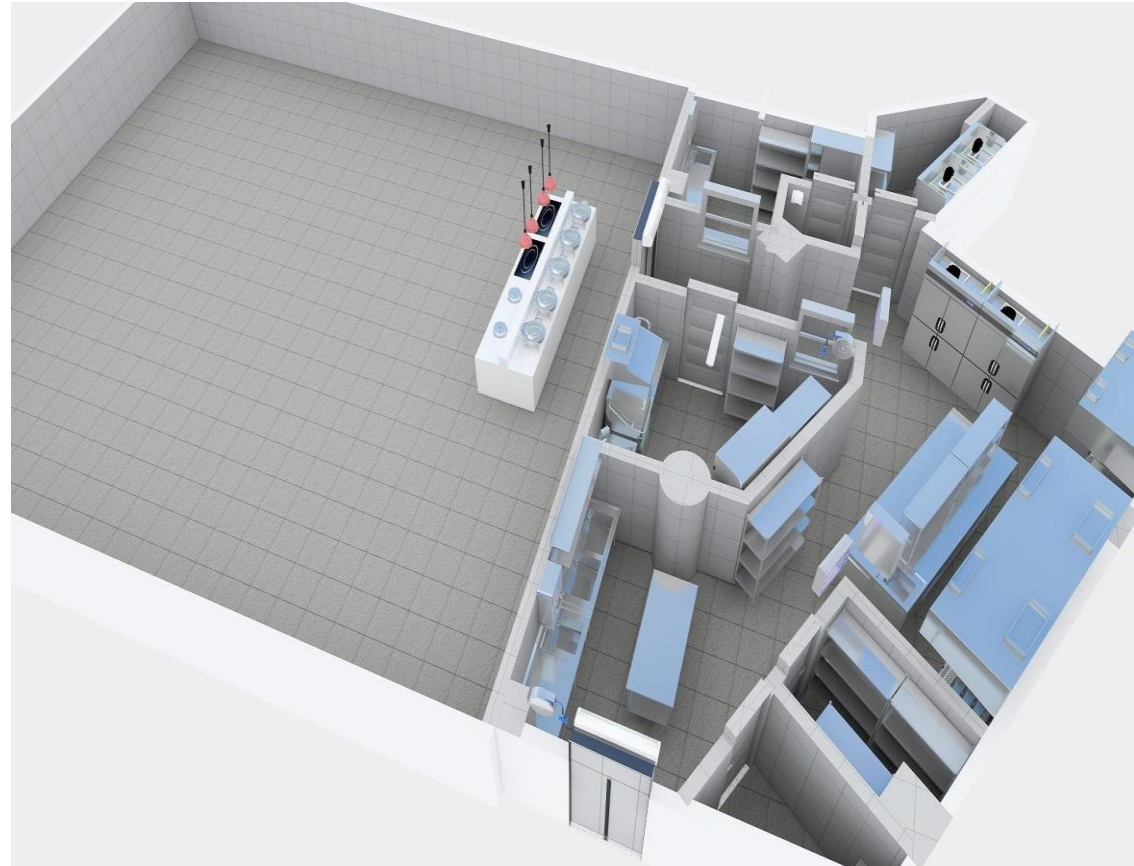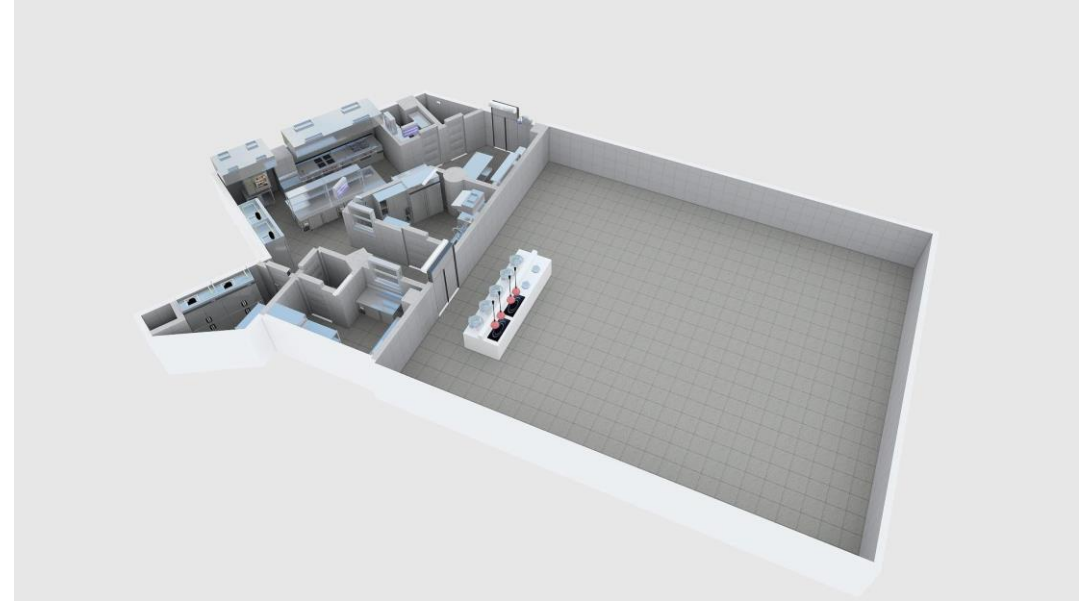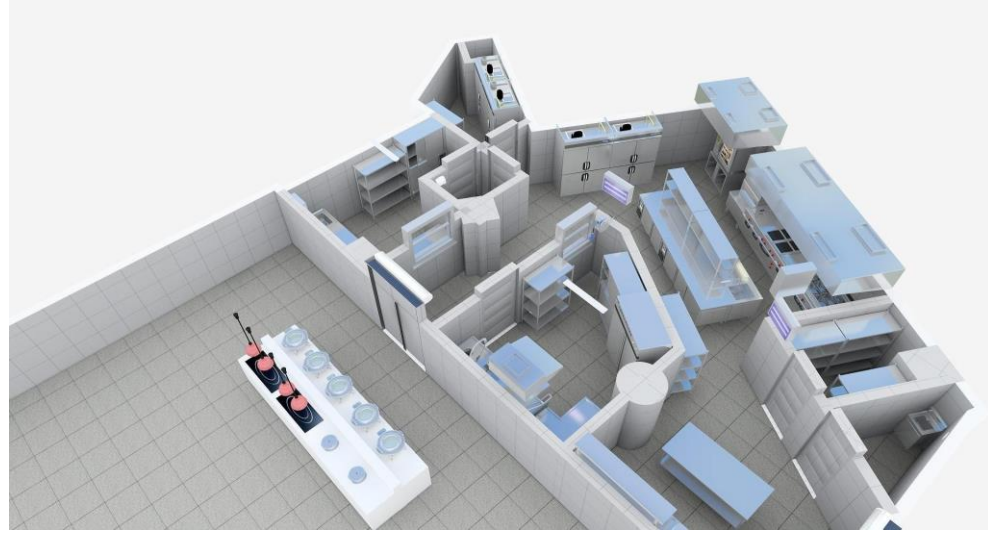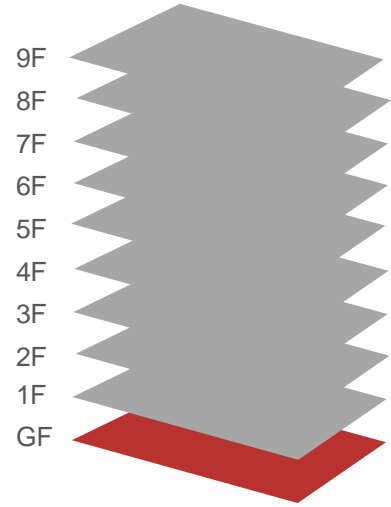

餐厅区产品配套设计方案 Restaurant area product matching design scheme



热板 Hot plate



电源: 1050W/220V 单相
 温度范围: 38-93° C
 安装方式: 嵌入式
 电源线位置: 远程终端控制
 标配控制盒: 178*64*76 mm (控制盒尺寸)
 镶边颜色: DB - 黑色
 可选配水平控制盒: 61*70*196 mm (控制盒尺寸)
 赫高黑玻璃保温板已通过食品安全认证, 陶瓷玻璃表面由恒温控制, HBGB型号可使食物的表面温度保持在 38° - 93° C 区间, HBGBH可使食物的表面温度保持在 21° - 125° C区间
 - 保温板材料通过食品安全级别认证
 - 超过914mm (36") 的保温板是由两块相同尺寸 的玻璃组成, 包含102mm (4") 支脚。
 Power supply : 1050W / 220V single-phase
 Temperature range : 38 - 93 ° C
 Installation : Embedded
 Power line position : remote terminal control
 Standard Control Box : 178 * 64 * 76 mm (Control Box Size)
 Edge color : DB - Black
 Optional Horizontal Control Box : 61 * 70 * 196 mm (Control Box Size)
 Hegao black glass insulation board has passed food safety certification.

嵌入式暖汤煲 Embedded Warm Soup Cooker



容量11L, 额定功率: 380V, 电压: 220V, 额定频率: 50-60HZ, 适用10A国标插头
 Capacity 11L, rated power 380V, voltage 220V, rated frequency 50-60HZ, suitable for 10A national standard plug

温控全钢全翻盖球形宴会餐炉
 Temperature-controlled full-cover spherical banquet furnace



S304不锈钢制作, 采用新工艺食品级硅胶固定, 更环保更安全。全新的复合阻尼开合测试可达30000次以上; 可拆卸式炉盖, 清洗方便, 容易储存, 独特的香蕉脚设计, 加热方式适用于火酒杯、电热板、电热杯、电磁炉加热。S304 stainless steel production, using new technology food grade silica gel fixation, more environmentally friendly and safer. The new composite damping switching test can reach more than 30000 times ; removable furnace cover, easy cleaning, easy storage, unique banana foot design, heating method is suitable for wine cup, electric plate, electric cup, electromagnetic furnace heating.

吊式金色暖食灯 Gold Warm Food Lamp





用电: 220V/250W;
 伸缩部分: 黑色;
 高度调节范围: 787-1765 mm;
 开关位置: 下方;
 灯罩尺寸: Φ156*216mm; Electricity : 220V / 250W ;
 expansion part : black ;
 height adjustment range : 787-1765 mm ;
 switch position : below ;
 lamp cover size : Φ156 * 216mm ;

餐厅区 Restaurant area







更衣室产品配套设计方案 Design scheme of dressing room products





更衣室		
<p>落地柜式洗手单星盆 Landing cabinet hand washing single star basin</p>		<p>采用SUS304-2B不锈钢板制造台面板厚1.2mm,水斗板厚1.0mm,水斗一体冲压成型,规格:350*248*145台下式下柜,前开维修门配φ45落水器 SUS304 - 2B stainless steel plate was used to manufacture the table panel with the thickness of 1.2 mm and the bucket plate with the thickness of 1.0 mm. The bucket was punched in one body, and the specification was 350 * 248 * 145 lower cabinets. The front maintenance door was equipped with φ</p>
<p>台出感应龙头 Step-out induction tap</p>		<p>单孔台出电子感应龙头防破坏 2.2GPM(8.3LPM)起泡器?防水控制盒AC/DC交直流两用手动混水阀?开孔:孔径32mm Single-hole electronic induction tap anti-destruction 2.2 GPM (8.3 LPM) frother ? Waterproof control box AC / DC dual-use manual mixing valve ? Openings : aperture 32mm</p>

<p>不锈钢全自动感应器 Automatic stainless steel sensor</p>		<p>220V50HZ1300W5.9A风速:17m/s;风量:160m3/h数码电路控制,红外线感应,抗干扰能力强 220V50HZ1300W5.9A wind speed : 17m / s ; air volume : 160 m3 / h digital circuit control, infrared induction, strong anti-interference</p>
<p>自动感应消毒器喷雾款 Automatic induction disinfectant spray</p>		<p>酒精喷雾 Alcohol spray</p>



<p>单星盆台Single Star Basin</p>		<p>采用SUS304-2B不锈钢板制造台面板厚1.2mm, 水斗板厚1.0mm, 前板、侧板厚0.8mm配2" 去水水斗一体冲压规格: 500*500*280 φ 38mm厚度1.0mm不锈钢圆通腿 φ 25mm厚度1.0mm不锈钢下横通配全钢可调式子弹脚。SUS304-2B stainless steel plate manufacturing table panel thickness 1.2mm, bucket plate thickness 1.0mm, front plate, side plate thickness 0.8mm with 2" water bucket integral stamping specifications : 500 * 500 * 280 φ 38mm thickness 1.0mm stainless steel round leg φ 25mm thickness 1.0mm stainless steel cross pass with all steel adjustable bullet foot</p>
<p>冷热水龙头hot and cold water tap</p>		<p>技术参数: 8 (203mm) 台出混水龙头; 10" (254mm) 摇摆水嘴; 采用无铅黄铜材质; 90° 旋转陶瓷阀芯; 一字手柄带有冷热水标色螺丝; 偏心法兰 (中心距可上下浮动6mm); 5.03GPM (19.04LPM) 层流出水装置; 开孔: 孔径25mm, 孔中心距102mm Technical parameters : 8 (203mm) mixer tap ; 10 ' (254mm) swing nozzle ; lead - free brass material ; 90° rotating ceramic valve core ; a handle with a cold and hot water marking screw ; eccentric flange (center distance can float up and down 6mm) ; 5.03GPM (19.04LPM) laminar flow effluent device ; openings : aperture 25 mm, center distance 102 mm</p>
<p>双星盆台Double Star Basin</p>		<p>采用SUS304-2B不锈钢板制造台面板厚1.2mm, 水斗板厚1.0mm, 前板、侧板厚0.8mm配2" 去水水斗规格: 730*500*280 φ 38mm厚度1.0mm不锈钢圆通腿 φ 25mm厚度1.0mm不锈钢下横通配全钢可调式子弹脚。SUS304 - 2B stainless steel plate was used to manufacture table panel thickness of 1.2 mm, bucket plate thickness of 1.0 mm, front plate and side plate thickness of 0.8 mm with 2" dewatering bucket specification : 730 * 500 * 280 φ 38 mm thickness of 1.0 mm stainless steel round leg φ 25 mm thickness of 1.0 mm stainless steel under cross pass with all-steel adjustable bullet leg</p>
<p>挂墙架 (双层) Wall mounted (double)</p>		<p>采用SUS304-2B不锈钢板制造, 板厚1.0mm支撑结构无螺丝外露。Manufactured with SUS304-2B Stainless Steel Plate. No Screw Exposed Support Structure with 1.0 mm Thickness</p>



<p>粘捕式灭蝇器Viscous fly extinguisher</p>		<p>以诱蝇光波和粘蝇纸结合来捕杀苍蝇等飞虫的灭蝇器亨得利灭蝇器的机壳采用1.2-1.7mm厚度的铝型材The shell of Hendley 's fly extinguisher, which combines fly light and flypaper to kill flies and other insects, is made of 1.2-1.7 mm aluminum</p>
<p>工作台下层板Floor under worktable</p>		<p>台面板采用SUS304-2B不锈钢板制造, 厚度为1.2mm, 下层板厚1.0mm面板下衬 δ 15木工板减噪, 木板下复铝板 φ 38mm厚度1.0mm不锈钢圆通腿下层框38*38*1.0mm加强码用0.8~1.2mm不锈钢板配全钢可调式子弹脚。Table panel is made of SUS304-2B stainless steel plate, thickness is 1.2mm, lower plate thickness is 1.0mm panel lining δ 15 woodworking plate noise reduction, aluminum plate under wood plate φ 38mm thickness 1.0mm stainless steel round leg lower frame 38 * 38 * 1.0mm reinforced code with 0.8 ~ 1.2mm stainless steel plate with all steel adjustable bullet foot</p>

粗加工区产品配套设计方案



<p>四层档货架Four-storey shelf</p>		<p>采用全不锈钢制作层框38*25*1.0不锈钢管制作搁档30*15*0.8不锈钢方管或不锈钢板折弯φ38mm厚度1.0mm不锈钢圆通腿配全钢可调式子弹脚。Stainless Steel Shelf 30 * 15 * 0.8 Stainless Steel Square Tube or Stainless Steel Plate Bending φ38mm Thickness 1.0mm Stainless Steel Round Leg with All Steel Adjustable Bullet</p>
<p>工作台下层板Floor under worktable</p>		<p>台面板采用SUS304-2B不锈钢板制造厚度为1.2mm，下层板厚1.0mm面板下衬δ15木工板减噪，木板下复铝板φ38mm厚度1.0mm不锈钢圆通腿下层框38*38*1.0mm加强码用0.8~1.2mm不锈钢板配全钢可调式子弹脚。Table panel using SUS304-2B stainless steel plate manufacturing thickness of 1.2 mm, lower plate thickness of 1.0 mm panel lining δ 15 woodworking plate noise reduction, wood panel aluminum plate φ 38 mm thickness 1.0 mm stainless steel round leg lower frame 38 * 38 * 1.0 mm reinforced code with 0.8 ~ 1.2 mm stainless steel plate with all steel adjustable bullet foot</p>

粗加工区
Rough processing area

<p>沸腾式电开水器Boiling electric water heater</p>		<p>功率：380V/6KW 容积：36L，供水量：60L/H 额定电流：9A ◆绝对是开水 ◆磁化保健 ◆磁吸缺水断电 ◆环保节能 ◆融入新专利 ◆净水器接口Power：380V / 6KW Volume：36L, water supply：60L / H The rated current：9A Absolutely boiling water Magnetic health care ● Magnetic absorption water-shortage and power-off Environmental protection and energy saving ● Integration of new patents ● Water purifier interface</p>
<p>开水器挂墙底座Water heater hanging wall base</p>		<p>优质304不锈钢制造, 设置排水装置, 外形简洁美观Manufacturing of high quality 304 stainless steel, setting drainage device, simple and beautiful appearance</p>

<p>单头净水器Single head water purifier</p>		<p>有效的去除杂质、余氯、细菌、孢子孢囊。随取随饮， 瞬间流量：5.7升/分钟 处理量：34069升 尺寸：43.2*8.1(cm) 过滤精度：0.5微米Effective removal of impurities, chlorine, bacteria, spore cysts. Drink with you. Instantaneous flow：5.7 L / min Processing capacity：34069 litres Size：43.2 * 8.1 (cm) Filtering precision：0.5 μm</p>
<p>粗过滤bulk filtration</p>		<p>改善原料水品质，从而提高饮品口感，减少因水垢而产生的设备故障及能耗。 瞬间流量：6.3升/分钟 处理水量：52995升 尺寸：50.2*8.1 (cm) 过滤精度：0.5微米Improve the quality of raw water, so as to improve the taste of drinks, reduce equipment failure and energy consumption caused by scale. Instantaneous flow：6.3 L / min Treatment water：52995 litres Size：50.2 * 8.1 (cm) Filtering precision：0.5 μm</p>


冷藏间产品配套设计方案



仓库、切配、烹饪 Warehouse, cutting, cooking



仓库、冷菜间 Warehouse, cold dish room

<p>四层档货架 Four-storey shelf</p>		<p>采用全不锈钢制作层框38*25*1.0不锈钢管制作搁档30*15*0.8不锈钢方管或不锈钢板折弯φ38mm厚度1.0mm不锈钢圆通腿配全钢可调式子弹脚 Stainless Steel Shelf 30 * 15 * 0.8 Stainless Steel Square Tube or Stainless Steel Plate Bending φ38mm Thickness 1.0mm Stainless Steel Round Leg with All Steel Adjustable Bullet</p>
--------------------------------	---	--





<p>立式四门冷藏柜 Vertical four door refrigerator</p>		<p>1、内外箱均为SUS304不锈钢板；2、使用进口压缩机，全铜管冷凝器、蒸发器；3、配备强制蒸发装置，自动蒸发化霜水；4、一体式发泡工艺，整体平整、耐用；5、产品能在43℃的环境温度下正常工作；6、置于箱体内部的高效防露加热丝，能有效防止门框结露、滴水，保证客户的使用效果和环境卫生；7、冰箱配备了门体自动关闭结构，方便客户操作。8、铜管蒸发器均增加二次防锈涂层，使用年限更久。-6~12℃ 1, inside and outside the box are SUS304 stainless steel plate ; 2. Use imported compressors, all-copper tube condensers and evaporators ; 3. equipped with forced evaporation device, automatic evaporation of frost water ; 4. Integrated foaming process, which is overall smooth and durable ; 5. The product can work normally at 43 ° C ambient temperature ; 6. High-efficiency anti- dew heating wire placed inside the box can effectively prevent dewing and dripping of door frames, and ensure customers ' use effect and environmental hygiene ; 7. Refrigerator is equipped with automatic door closing structure to facilitate customer operation. 8. Copper tube evaporators are added secondary antirust coating, longer</p>
--	---	---

<p>立式四门冷冻柜 Vertical four door freezer</p>		<p>1、内外箱均为SUS304不锈钢板；2、使用进口压缩机，全铜管冷凝器、蒸发器；3、配备强制蒸发装置，自动蒸发化霜水；4、一体式发泡工艺，整体平整、耐用；5、产品能在43℃的环境温度下正常工作；6、置于箱体内部的高效防露加热丝，能有效防止门框结露、滴水，保证客户的使用效果和环境卫生；7、冰箱配备了门体自动关闭结构，方便客户操作。-22~-15℃ 1, inside and outside the box are SUS304 stainless steel plate ; 2. Use imported compressors, all-copper tube condensers and evaporators ; 3. equipped with forced evaporation device, automatic evaporation of frost water ; 4. Integrated foaming process, which is overall smooth and durable ; 5. The product can work normally at 43 ° C ambient temperature ; 6. High-efficiency anti- dew heating wire placed inside the box can effectively prevent dewing and dripping of door frames, and ensure customers ' use effect and environmental hygiene ; 7. Refrigerator is equipped with automatic door closing structure to facilitate customer operation. -22-15 ° C</p>
---	---	--





冷菜间产品配套设计方案

冷菜间Cold Dish Room



<p>紫外线消毒灯 ultraviolet disinfection lamp</p>		<p>石英材质灯管，接口与家用相吻合，安装方便 灯管两端镀铬材质，安全绝缘安装维护， 额定功率：40W 灯管直径825MM 灯管长度：1200mm 消毒方式：紫外线消毒 Quartz light tube, interface with home, easy installation Chromium plating material at both ends of the lamp tube, safe insulation installation and maintenance. rated power : 40W lamp diameter 825MM Lamp tube length : 1200mm Disinfection method : ultraviolet disinfection</p>	<p>落地柜式洗手双星盆 Landing cabinet type hand washing double star basin</p>		<p>采用SUS304-2B不锈钢板制造台面板厚1.2mm,水斗板厚1.0mm,水斗一体冲压成型,规格:350*248*145台下式下柜,前开维修门配φ45落水器 SUS304 - 2B stainless steel plate was used to manufacture the table panel with the thickness of 1.2 mm and the bucket plate with the thickness of 1.0 mm. The bucket was punched in one body, and the specification was 350 * 248 * 145 lower cabinets. The front maintenance door was equipped with φ45 water dropper.</p>
<p>落地柜式洗手双星盆 Landing cabinet type hand washing double star basin</p>		<p>采用SUS304-2B不锈钢板制造台面板厚1.2mm,水斗板厚1.0mm,水斗一体冲压成型,规格:350*248*145台下式下柜,前开维修门配φ45落水器 SUS304 - 2B stainless steel plate was used to manufacture the table panel with the thickness of 1.2 mm and the bucket plate with the thickness of 1.0 mm. The bucket was punched in one body, and the specification was 350 * 248 * 145 lower cabinets. The front maintenance door was equipped with φ45 water dropper.</p>	<p>台出感应龙头 Step-out induction tap</p>		<p>单孔台出电子感应龙头防破坏2.2GPM(8.3LPM)起泡器?防水控制盒AC/DC交直流两用手动混水阀?开孔:孔径32mm Single-hole electronic induction tap anti-destruction 2.2 GPM (8.3 LPM) frother ? Waterproof control box AC / DC dual-use manual mixing valve opening : aperture 32mm</p>
			<p>不锈钢全自动感应器 Automatic stainless steel sensor</p>		<p>220V50HZ1300W5.9A风速:17m/s;风量:160m3/h数码电路控制,红外线感应,抗干扰能力强 220V50HZ1300W5.9A wind speed : 17m / s ; air volume : 160 m3 / h digital circuit control, infrared induction, strong anti-interference</p>




<p>自动感应消毒器喷雾款 Automatic induction disinfectant spray</p>		<p>酒精喷雾 Alcohol spray</p>	<p>单星盆柜 Single star basin cabinet</p>		<p>采用SUS304-2B不锈钢板制造一台面板厚1.0mm,水斗板厚1.0mm,前板、侧板厚0.8mm—配2"去水—水斗一体冲压规格:500*500*280—门外板厚1.0mm,门内复板0.6mm—配包钢可调式子弹脚 SUS304-2B Stainless Steel Sheet Manufacturing - Table Panel Thickness 1.0 mm, Bucket Thickness 1.0 mm, Front Plate Thickness 0.8 mm, Side Plate Thickness - With 2" Dewatering - Bucket Integrated Stamping Specification : 500 * 500 * 280 - Outdoor Panel Thickness 1.0 mm, Indoor Panel Thickness 0.6 mm - With Packaged Steel Adjustable Bullet</p>
<p>高身储碟柜 High body storage cabinet</p>		<p>采用SUS304-2B不锈钢板制造层板、底板厚为1.0mm,门外板厚1.0mm,门内复板厚0.6mm,顶板厚0.8mm,侧板厚0.8mm上掀式翻门φ50不锈钢重力脚 The SUS304 - 2B stainless steel plate was used to manufacture the φ50 stainless steel gravity foot with the thickness of floor and floor of 1.0 mm, the thickness of outer panel of 1.0 mm, the thickness of inner panel of 0.6 mm, the thickness of roof of 0.8 mm, and the thickness of side panel of 0.8 mm.</p>	<p>单头净水器 Single head water purifier</p>		<p>有效的去除杂质、余氯、细菌、孢子孢囊。随取随饮, 瞬间流量:5.7升/分钟 处理量:34069升 尺寸:43.2*8.1(cm) 过滤精度:0.5微米 Effective removal of impurities, chlorine, bacteria, spore cysts. Drink with you. Instantaneous flow : 5.7 L / min Processing capacity : 34069 litres Size : 43.2 * 8.1 (cm) Filtering precision : 0.5 μm</p>

冷菜间产品配套设计方案



冷菜间 Cold Dish Room

<p>工作台柜 (移门) Work desk cabinet (door shift)</p>		<p>采用SUS304-2B不锈钢板制造, 台面板厚1.2mm面板下衬 δ 15木工板减噪, 木板下复铝板侧板、后背板 0.8mm, 门内复板0.6mm门外板、柜内层板、底板厚 1.0mm路轨导向趟门配 φ 50不锈钢重力脚 Manufactured with SUS304-2B stainless steel plate, noise reduction of δ 15 woodworking plate with 1.2 mm panel thickness, side plate covered with aluminum plate and 0.8 mm rear back plate, 0.6 mm door outer plate covered with door inner plate, cabinet inner plate and 1.0 mm bottom plate thickness rail guide gate equipped with φ50 stainless steel gravity foot</p>
---	---	---

<p>粗过滤 bulk filtration</p>		<p>改善原料水质, 从而提高饮品口感, 减少因水垢而产生的设备故障及能耗。 瞬间流量: 6.3升/分钟 处理水量: 52995升 尺寸: 50.2*8.1 (cm) 过滤精度: 0.5微米 Improve the quality of raw water, so as to improve the taste of drinks, reduce equipment failure and energy consumption caused by scale. Instantaneous flow : 6.3 L / min Treatment water : 52995 litres Size : 50.2 * 8.1 (cm) Filtering precision : 0.5 μm</p>
<p>刀具消毒柜 Tool Disinfection Cabinet</p>		<p>304材质、防辐射有机玻璃、安全可靠 紫外线消毒技术、清洁卫生 120分钟定时器 带有钥匙锁具、方便管理 可放置8~10把刀具 304 Material, Radiation - proof Organic Glass, Safety and Reliability Ultraviolet disinfection technology and sanitation 120 minutes timer Key locks, easy management 8-10 tools available</p>

<p>卧式两门冷藏柜 Horizontal two door refrigerator</p>		<p>1、内外箱均为SUS304不锈钢板; 2、使用进口压缩机, 全铜管冷凝器、蒸发器; 3、配备强制蒸发装置, 自动蒸发化霜水; 4、整机及台面采用一体式发泡工艺, 整体平整、耐用; 5、产品能在43℃的环境温度下正常工作; 6、置于箱体内部的高效防露加热丝, 能有效防止门框结露、滴水, 保证客户的使用效果和环境卫生; 7、冰箱配备了门体自动关闭结构, 方便客户操作。8、采用“前吸风前排风”设计, 更加有利于排风扇热, 适用于高档酒店及明档厨房使用要求。9、铜管蒸发器均增加二次防锈涂层, 使用年限更久。 1. inside and outside the box are SUS304 stainless steel plate ; 2. Use imported compressors, all-copper tube condensers and evaporators ; 3. equipped with forced evaporation device, automatic evaporation of frost water ; 4. The whole machine and the table adopt integral foaming process, which is flat and durable. 5. The product can work normally at 43 ° C ambient temperature ; 6. High-efficiency anti- dew heating wire placed inside the box can effectively prevent dewing and dripping of door frames, and ensure customers ' use effect and environmental hygiene ; 7. Refrigerator is equipped with automatic door closing structure to facilitate customer operation. 8. The use of ' exhaust before suction ' design, more conducive to exhaust fan heat, suitable for high-end hotels and open kitchen requirements. 9. Copper tube</p>
---	---	--

主厨房产品配套设计方案

<p>智慧厨房AI监控系统Intelligent kitchen AI supervision system</p>		<p>利用机器视觉、物联网、大数据数据采集等技术提供有害生物预警、厨师穿戴识别、温湿度预警、健康证预警等功能，支持PC端和微信小程序。</p> <p>硬件配置包含：</p> <ol style="list-style-type: none"> 1、壁挂显示屏 1套 2、网络监控摄像头 8个 3、网络监控硬盘录像机 1个 4、视频智能分析盒子1个 5、温湿度变送器 9个 6、服务器1台 7、智慧厨房AI监控系统 1套 8、施工安装及辅材 定制 1套 <p>Using machine vision, Internet of Things, big data acquisition and other technologies to provide pest warning, chef wear recognition, temperature and humidity warning, health certificate warning and other functions, support PC side and WeChat applet.</p> <p>Hardware includes :</p> <ol style="list-style-type: none"> 1. Wall mounted display 1 set 2. 8 network surveillance cameras 3. One network monitoring hard disk recorder 4. Video intelligent analysis box 1 5. Nine temperature and humidity transmitters 6. One server 7. Intelligent kitchen AI supervision system 8. Construction installation and accessories customization 1 set



<p>容积式电热水器storage electric water heater</p>		<ol style="list-style-type: none"> (1) 壁挂式储水式电热水器； (2) 能效等级：一级； (3) 金圭特护加热棒，金圭内胆； (4) 配套支架、遥控器、止回阀等安装附件； (5) 配有温度水位显示功能 (6) 配中英文对照的产品说明书。（1）Wall-mounted water storage water heater ; (2) Energy efficiency rating : level I ; (3) Jingui special protection heating rod, Jingui bile ; (4) supporting brackets, remote controls, check valves and other installation accessories ; (5) With temperature and water level display function (6) Product instructions with Chinese and English comparison.
---	--	--




主厨房产品配套设计方案






主厨房Main kitchen			
单星盆台连垃圾桶柜 Single star basin continuous garbage bin cabinet	卧式两门冷藏柜 Horizontal two door refrigerator	工作台柜 (移门) Work desk cabinet (door shift)	座台双层架 Double frame of pedestal
			
采用SUS304-2B不锈钢板制造, 台面板厚1.2mm—水斗板厚1.0mm, 配2"去水—水斗规格: 400*400*280—侧板、后背板0.8mm, 门内复板0.6mm—门外板、柜内层板、底板厚1.0mm—星盆下开门结构, 垃圾桶柜采用侧开式—配φ50不锈钢重力脚 Manufactured with SUS304-2B stainless steel plate, table panel thickness 1.2mm-water hopper plate thickness 1.0mm, with 2 " Dewatering-water hopper specifications : 400 * 400 * 280-side plate, back plate 0.8mm, door inner cover plate 0.6mm-door outer plate, cabinet inner layer plate, bottom plate thickness 1.0mm-open door structure under star basin, garbage bin with side open-fitting φ50 stainless steel gravity foot	内外箱均为SUS304不锈钢板; 使用进口压缩机, 全铜管冷凝器、蒸发器; 配备强制蒸发装置, 自动蒸发化霜水; 整机及台面采用一体式发泡工艺, 整体平整、耐用; 产品能在43°C的环境温度下正常工作; 置于箱体内部的高效防露加热丝, 能有效防止门框结露、滴水, 保证客户的使用效果 inside and outside the box are SUS304 stainless steel plate ; use imported compressor, copper tube condenser, evaporator ; equipped with forced evaporation device, automatic evaporation of frost water ; the whole machine and the table adopt the integrated foaming process, which is flat and durable. the product can work normally at 43 °C ambient temperature ; high efficient anti- dew heating wire placed inside the box can effectively prevent condensation and dripping of door frame, and ensure the use effect of customers	采用SUS304-2B不锈钢板制造, 台面板厚1.2mm面板下衬δ15木工板减噪, 木板下复铝板侧板、后背板0.8mm, 门内复板0.6mm门外板、柜内层板、底板厚1.0mm路轨导向趟门配φ50不锈钢重力脚 Manufactured with SUS304-2B stainless steel plate, noise reduction of δ15 woodworking plate with 1.2 mm panel thickness, side plate covered with aluminum plate and 0.8 mm rear back plate, 0.6 mm door outer plate covered with door inner plate, cabinet inner plate and 1.0 mm bottom plate thickness rail guide gate equipped with φ50 stainless steel gravity foot	采用SUS304-2B不锈钢板制造, 层板厚1.0mmφ32mm厚度1.0mm不锈钢圆通腿 Made of SUS304-2B stainless steel plate, 1.0 mm φ32 mm stainless steel round leg



主厨房Main kitchen			
镀铝烤盘 (不沾) 0.7mm Aluminum plated baking tray (not stained) 0.7mm	双头净水器 Double head water purifier	粗过滤 bulk filtration	灭火系统 fire fighting system
			
采用SUS304不锈钢板材制造 Manufacture of SUS304 Stainless Steel Sheet	流速：11.4升/分钟 处理量：18000加仑 (66600升) 建议主滤芯更换时间：12-15个月 Flow rate : 11.4 L / min Treatment capacity : 18000 gallons (66600 litres) Suggested main filter replacement time : 12-15 months	改善原料水品质，从而提高饮品口感，减少因水垢而产生的设备故障及能耗。 瞬间流量：6.3升/分钟 处理水量：52995升 尺寸：50.2*8.1 (cm) 过滤精度：0.5微米 Improve the quality of raw water, so as to improve the taste of drinks, reduce equipment failure and energy consumption caused by scale. Instantaneous flow : 6.3 L / min Treatment water : 52995 litres Size : 50.2 * 8.1 (cm) Filtering precision : 0.5µm	1. 可调释放机械装置是加载弹簧力学/ 充气加压型，能向液剂罐提供释出气体。并提供反馈触点可通过火灾报警模块，将系统动作信号反馈给消防监控室。包括可供按钮和显示器使用的开口。可调释放机械装置应与机械气体供应关闭装置相配合。 1. The adjustable release mechanism is a spring-loaded mechanical / pneumatic compression type capable of providing release gas to a liquid tank. And provide feedback contacts through the fire alarm module, the system action signal feedback to the fire control room. It includes openings for buttons and displays. The adjustable release mechanical device shall be matched with the mechanical gas supply closing device.

主厨房Main kitchen		
<p>电热单缸炸炉下储物柜 Storage cabinet under electric heating single cylinder blast furnace</p>	<p>电热四头平头炉下焗炉 Baking furnace under electric heating four head flat furnac</p>	<p>电热1/2平1/2坑扒炉下储物柜 Storage cabinet under electric heating 1 / 2 flat 1 / 2 pit</p>
		
<p>全不锈钢机身结构 弧面倾斜式面板设计 可调不锈钢脚，放置平稳 “V”形冷凉区沉积渣物，防粘于发热管上烧焦 温度自动控制调节范围60°C~190°C，230°C油温超温保护 特大油缸(每缸可装25L油) 传热效率高，可防止粘底及炉体温度过高 电总功率：9.0kW 380V~/3N/50H All stainless steel fuselage structure Design of curved inclined panel Adjustable stainless steel foot, placed smoothly Deposited slag in 'V'-shaped cold zone prevents coking on heating tube Automatic temperature control range 60 °C ~ 190 °C, 230 °C oil temperature protection Extra large cylinder (25L oil per cylinder) High heat transfer efficiency can prevent high temperature of sticky bottom and furnace body Total power : 9.0kW 380V ~ / 3N / 50H</p>	<p>全不锈钢机身结构可调不锈钢脚，放置平稳采用 SUS304#2.0mm厚工作台面，整体冲压成型每个炉盘可由快、中、慢三档火力控制，热效率高炉盘底有强风冷却采用带自动复位超温保护装置的EGO加热炉盘下焗炉为嵌入式结构，内胆尺寸560×660×330mm，可放2/1GN盘电功率：380V,50Hz,2.6kWx4+6kW=16.4kW" All stainless steel fuselage structure can be adjusted with stainless steel foot, and SUS304 # 2.0 mm thick working table is used for stable placement. The overall stamping forming of each furnace plate can be controlled by fast, medium and slow three-stage firepower. The bottom of thermal efficiency blast furnace plate has strong wind cooling. The EGO heating furnace under the plate with automatic reset and over-temperature protection device is an embedded structure. The size of the inner liner is 560 × 660 × 330 mm, and the electric power of 2 / 1 GN plate can be put : 380 V, 50 Hz, 2.6 kWx4 + 6 kW = 16.4 kW',</p>	<p>全不锈钢机身结构可调不锈钢脚，放置平稳采用 SUS304#2.0mm厚工作台面，整体冲压成型18mm厚的磨砂精钢扒板,下沉式的耐热钢扒板无缝焊接在台面上配置抽拉式活动的盛油盆，易于油脂收集及清洁设置隔热板和挡火板，提高热效率，防止外部过热恒温控制，100°C~300°C可调设置400°C超温保护，可手动复位电功率:380V,50Hz,9kW" The adjustable stainless steel foot of the whole stainless steel fuselage structure is placed smoothly on the working table with SUS304 # 2.0 mm thickness. The 18 mm thick grinding fine steel stripper is formed by integral stamping. The sinking heat-resistant steel stripper is welded seamlessly on the table with a pull-out type active oil basin. It is easy to collect oil and cleanly set the heat insulation plate and fire baffle, improve the thermal efficiency, and prevent the external overheating constant temperature control. The 400 °C over-temperature protection can be adjusted from 100 °C to 300 °C, and the electric power can be manually reset to 380 V, 50 Hz, 9 kW ', '</p>

主厨房Main kitchen		
<p>电热万能蒸烤箱(10*1/1GN) Electric universal steam oven (10 * 1 / 1GN)</p>	<p>万能烤箱底座连插盘架 Universal oven base socket tray</p>	
		
<p>配备自动烹饪系统烹饪模式，手动清洗系统可卷绕喷头控制装置，可自动反向，确保火候完美均匀。一烤室与中心温度平行控制，自动调节蒸汽冷凝，在设定时间内启动区别化烹饪，所有主要功能设备运行计时器，用于计划维护，根据产品的类型及数量可优化并监控能量释放，时刻保持对的烹饪温度，避免波动因对烤室内水蒸气饱和度进行自控，可获得显著节能节水效果造；一IPX5防水保护，烤室完美密封双层钢化玻璃门，带有空隙与热反射内层玻璃，对操作员热辐射更少，更高效；一内层玻璃书本式打开，清洁方便。可打开旋转窗，方便清洁风机室全不锈钢机身结构、内部为弧形转角不锈钢内胆，方便清洁，符合HACCP国际卫生标准、可容纳多种盘；一微电脑自动控制集干蒸、湿蒸和烘烤等功能于一体；一可自行设定多种程序,能减少繁复操作，提高工作效率；一设有缓冲加热、门开关安全、蒸汽反馈等功能；一缺水保护，防止发热管干烧；一设有耐高温玻璃门及柜内照明灯，容易检视操作情况；干蒸温度:30°C~300°C湿蒸温度:30°C~130°C烘烤温度:30°C~300°C进水口:DN15排水口:DN40</p> <p>Equipped with automatic cooking system cooking mode, manual cleaning system can winding nozzle control device, can automatically reverse, to ensure perfect uniform fire. The first baking room is controlled in parallel with the central temperature, and the steam condensation is automatically adjusted. The differentiated cooking is started within the set time. All the main functional equipment runs the timer for planned maintenance. According to the type and number of products, the energy release can be optimized and monitored, and the right cooking temperature can be maintained at all times. The fluctuation can be avoided due to the automatic control of the steam saturation in the baking room, and the remarkable energy saving and water saving effect can be obtained. IPX5 waterproof protection, oven perfect sealing double-layer toughened glass door, with voids and heat reflection inner glass, less heat radiation to operators, more efficient ; one inner glass book is open and easy to clean. Can open the rotating window, convenient cleaning fan room stainless steel fuselage structure, internal arc angle stainless steel liner, convenient cleaning, in line with HACCP international health standards, can accommodate a variety of plates ; microcomputer automatic control set dry steam, wet steam and baking functions in one ; one can set a variety of programs, can reduce the complex operation, improve work efficiency ; one is provided with functions such as buffer heating, door switch safety, and steam feedback ; a lack of water protection, prevent the heating pipe dry burning ; a high temperature glass door and cabinet lighting, easy to inspect the operation ; dry steam temperature : 30 °C ~ 300 °C wet steam temperature : 30 °C ~ 130 °C baking temperature : 30 °C ~ 300 °C inlet : DN15 drain : DN40</p>		<p>台面采用SUS304-2B不锈钢板制造板厚1.2mm,立柱采用38*38*1.0不锈钢方管插盘搁架板厚2.0mm配全钢可调式子弹脚</p> <p>The table surface was made of SUS304 - 2B stainless steel plate with a thickness of 1.2 mm, and the column was made of 38 * 38 * 1.0 stainless steel square pipe plug shelves with a thickness of 2.0 mm and all-steel adjustable bullet</p>



主厨房Main kitchen		
<p>沥油式油烟罩 Lease type lampblack cover</p>	<p>平板调料台 Plate dressing table</p>	<p>工作台面连下储物柜 Work desk with storage cabinet</p>
		
<p>—采用SUS304-2B不锈钢板制造—配防雾烟罩灯 —前板、左右端板厚1.2mm, 顶板、后板厚1.0mm—各加强档厚0.8~1.2mm—沥油板厚0.7mm—风机排烟风管另计,220V/0.5KW -Using SUS304-2B stainless steel plate manufacturing-with anti-fog smoke cover lamp-front plate, left and right end plate 1.2mm thick, roof, rear plate 1.0mm thick 0.8~1.2mm-each drain plate 0.7mm thick-fan exhaust pipe another, 220V/0.5KW</p>	<p>—采用SUS304-2B不锈钢板制造—台面板厚1.2mm, 后挡板、前围板厚1.0mm—φ38mm厚度1.0mm不锈钢圆通腿—φ25mm厚度1.0mm不锈钢下横通—配全钢可调式子弹脚 - Made of SUS304-2B stainless steel plates - 1. 2 mm panel thickness, 1. 0 mm rear baffle, 1. 0 mm front panel thickness - φ38 mm thickness 1. 0 mm stainless steel round leg - φ25 mm thickness 1. 0 mm stainless steel lower traverse - equipped with all-steel adjustable bullet feet</p>	<p>全不锈钢机身使用可调子弹脚台面用料为304不锈钢1.5mm厚" All stainless steel fuselage with adjustable bullet foot table material 304 stainless steel 1.5 mm thick'</p>






主厨房产品配套设计方案



主厨房Main kitchen	
<p>电热意粉炉下储物柜 Storage cabinet under electrothermal powder furnace</p>	<p>沥油式油烟罩 Oil fume hood</p>
<p>全不锈钢机身结构可调不锈钢脚，放置平稳采用SUS304#2.0mm厚工作台面，整体冲压成型沸腾水泡自动爆散面团，并防止沸水溅溢设置溢水槽，自动补水装置煮面缸容量大(35L-900系列，25L-750系列),升温速度快缺水保护，防止发热管干烧煮面缸容量大,温度恒定高效发热线，三档快、中、慢火力调节电压:380V,50Hz,9kWx2=18kW"</p> <p>The structure of all-stainless steel fuselage can be adjusted by stainless steel foot, and the working table with SUS304 # 2.0 mm thickness is placed smoothly. The boiled water bubble automatically explodes the dough by integral stamping, and the overflow tank is set to prevent the splashing of boiling water. The capacity of the boiled surface cylinder of the automatic water supply device is large (35L-900 series, 25L-750 series). The heating rate is fast and the water shortage protection is fast. The capacity of the dry boiled surface cylinder of the heating pipe is large, and the temperature is constant and the efficient heating line is high. The three levels of fast, medium and slow power adjustment voltages are 380 V, 50 Hz, and 9 kWx2 = 18 kW , ,</p>	<p>—采用SUS304-2B不锈钢板制造 —配防雾烟罩灯—前板、左右端板厚1.2mm，顶板、后板厚1.0mm—各加强档厚0.8~1.2mm—沥油板厚0.7mm—风机排烟风管另计 ,220V/0.5KW</p> <p>- SUS304-2B Stainless Steel Sheet Manufacturing - Smokeproof Lamp - Front Plate, Left and Right End Plate Thickness 1.2mm, Roof Plate Thickness 1.0mm, Back Plate Thickness 0.8 ~ 1.2mm, Leachate Plate Thickness 0.7mm - Fan Exhaust Pipe Additional, 220V / 0.5KW</p>

排烟设备Smoke elimnating equipment	
厢式风机 Chamber fan	油烟净化器 oil smoke purifier
	
<p>—处理风量：12000m³/h —风压：≥850Pa —采用双进风多翼式前倾叶轮，大流量，高静音,高效率，具有良好的节能效果，叶片表面不易积油污，清理更容易； —主轴采用忧质40铬钢精工制作而成，氧调质热处理，保证其强度对使用寿命； —面板采用喷塑镀锌钢板，具有良好消音效果</p> <p>- Treatment air volume : 12000 m³ / h - Wind pressure : ≥ 850 Pa - The double-inlet multi-wing forward impeller with large flow, high quiet, high efficiency has good energy saving effect, and the surface of the blade is not easy to accumulate oil, so it is easier to clean up ; - The spindle is made of 40 chrome steel fine work, oxygen quenching and tempering heat treatment to ensure its strength life ; - Sprayed galvanized steel sheet for panel with good silence effect</p>	<p>法兰内径离地高度150mm；风阻 < 200pa；净化率≥95% 采用厚度0.7mm不锈钢蜂窝电场二级处理，适用于进口初始浓度为20mg/m³左右中高浓度油烟、达标排放。出口浓度≤1mg/m³，目测基本无烟，去味效果≤50%无量纲 机箱外壳冷板1.0厚，法兰冷板2.0厚 专用智能数字电源具有恒流输出控制、灭弧保护、多次放电保护、高压开路保护、高压短路保护、电源过载保护和变压器过温保护等功能。 电场和绝缘陶瓷独特的结构设计</p> <p>The inner diameter of flange is 150 mm from the ground ; wind resistance < 200pa ; purification rate ≥ 95 % The thickness of 0.7 mm stainless steel honeycomb electric field secondary treatment, suitable for inlet initial concentration of about 20 mg / m³ high concentration of oil fume, discharge standards. Export concentration ≤ 1 mg / m³, visual basic smokeless, deodorant effect ≤ 50 % dimensionless Case shell cold plate 1.0, flange cold plate 2.0 The special intelligent digital power supply has the functions of constant current output control, arc extinguishing protection, multiple discharge protection, high voltage open circuit protection, high voltage short circuit protection, power overload protection and transformer over-temperature protection. Unique structural design of electric field and insulating ceramics</p>





排烟设备Smoke elimnating equipment		
厨灵智能控制 Kitchen intelligence control	风机净化器底座 Fan purifier base	风机减震器 Fan shock absorb
		
<p>商业厨房量身定制；触控按键，科技智能，一键设置切换；变频控制，无极调速；集成风机、净化器、燃气报警联动控制；不锈钢拉丝箱体，奢华精致；体机小巧，便于安装；触摸按键自动解锁，防止误操作</p> <p>Customized commercial kitchen ; touch key, technical intelligence, one key setting switch ; frequency conversion control, poleless speed regulation ; integrated fan, purifier, gas alarm linkage control ; stainless steel wire drawing box, luxurious exquisite ; small machine, easy to install ; touch keys automatically unlock to prevent misoperation</p>	<p>—采用镀锌角铁制作 —承受重量：1000KG</p> <p>- Made of galvanized angle iron - Weight : 1000KG</p>	<p>减震器利用减震器将风机和大地隔离，减震器可以有效阻止风机的震动传向大地，防止震动源的传播，从而起到降低震动的效果</p> <p>弹簧均经热处理、ED防锈、烤漆等程序处理。荷重挠度25mm、40mm能有效消除机械结构震动。尼龙材质工作温度0℃ ~ 50℃</p> <p>承重250KG以上</p> <p>The shock absorber uses the shock absorber to isolate the fan from the earth. The shock absorber can effectively prevent the vibration of the fan from transmitting to the earth and prevent the propagation of the vibration source, so as to reduce the vibration.</p> <p>The springs were all treated by heat treatment, ED rust prevention, baking paint and other procedures. Load deflection 25mm, 40mm can effectively eliminate mechanical structure vibration. Nylon Material Working Temperature 0 °C ~ 50 °C</p> <p>Loading above 250 KG</p>

洗消间产品配套设计方案



洗消间Washing room			
单星污碟台 Single Star Desk	预冲洗花洒装置带附加龙头 Pre-washed flower-sprinkling device with additional tap	提拉式洗碗机 Crawler dishwasher	洁碟台连下层框架 Cleaner table with lower frame
			
<p>台面采用SUS304-2B不锈钢板制造板厚1.2mm,水斗板厚1.0mm,前板、侧板厚0.8mm配两只星盆,尺寸定制 φ38mm厚度1.0mm不锈钢圆通腿 φ25mm厚度1.0mm不锈钢下横通配全钢可调式子弹脚</p> <p>SUS304-2B stainless steel plate is used to make plate thickness 1.2 mm, bucket plate thickness 1.0 mm, front plate and side plate thickness 0.8 mm with two starpots, φ38 mm thickness 1.0 mm stainless steel round leg φ25 mm thickness 1.0 mm stainless steel cross pass with all steel adjustable bullet foot</p>	<p>快装单孔台出混水龙头 总高1176mm 90°旋转Eterna压缩阀芯带有止回阀 一字手柄带有冷热水标色指示片 12"(305mm)附加龙头 1.15GPM(4.35LPM)喷阀 开孔: 孔径38mm</p> <p>Quick-loading single-hole mixing tap Total height 1176 mm 90° rotating Eterna compression valve core with check valve One-word handle with cold and hot water color indicator 12 ' (305mm) additional tap 1.15GPM (4.35LPM) jet valve Opening : aperture 38 mm</p>	<p>入口高度≥440mm; 机器高度可从820mm调节到850mm; 双层壁式结构: 壁体采用高品质不锈钢材质, 双层式隔热结构, 抗腐, 降噪, 耐用, 节能; 环保式过滤系统: 有效去除食物残渣, 保持洗涤缸内的水的清洁, 优化过滤效果; 自清洗功能: 配置自动清洗功能, 减少人员工作负荷, 省时省力</p> <p>The entrance height ≥ 440mm ; the machine height can be adjusted from 820mm to 850mm ; double-layer wall structure : high-quality stainless steel wall body, double-layer insulation structure, corrosion resistance, noise reduction, durability, energy saving ; environmental Filtration System : Effectively remove food residue, keep washing cylinder water clean, optimize the filtration effect ; self - cleaning function : Configure automatic cleaning function, reduce staff workload, save time and effort</p>	<p>台面采用SUS304-2B不锈钢板制造, 板厚1.2mm前板、侧板厚0.8mmφ38mm厚度1.0mm不锈钢圆通腿φ25mm厚度1.0mm不锈钢下横通配全钢可调式子弹脚</p> <p>Table surface is made of SUS304-2B stainless steel plate, 1.2mm front plate, 0.8mm φ38mm side plate thickness 1.0mm stainless steel round leg φ25mm thickness 1.0mm stainless steel lower cross pass with all steel adjustable bullet foot</p>

洗消间产品配套设计方案

洗消间Washing room			
立式双门消毒柜 Vertical double door disinfection	高身储碟柜 High body storage cabinet	四层板货架Four-floor shelf	洗地龙头 Land washing tap
			
<p>1、内外箱均为优质不锈钢板；2、使用耐高温风机、不锈钢加热管及微电脑控制板；3、柜内配备不锈钢网篮，网框为不锈钢材质，表面二次镀镍防锈，卫生、耐用4、内箱板材厚度0.7mm，外箱板材厚度0.8mm。外箱顶部及外箱后背板使用环保无锌花表面钝化优质镀锌板；5、产品具有消毒产品卫生许可证，电器安全检测报告。30~150°C</p> <p>1. Internal and external box are high quality stainless steel plate ; 2. 2. Using high-temperature resistant fan, stainless steel heating tube and microcomputer control panel ; 3. The cabinet is equipped with stainless steel basket, the net frame is stainless steel material, the surface of nickel plating antirust, hygiene, durability 4, the inner box plate thickness 0.7mm, the outer box plate thickness 0.8mm. high-quality galvanized sheet was passivated on the top of the outer box and the back plate of the outer box with environmentally friendly zinc-free flower surface ; 5. Products with disinfection product hygiene license, electrical safety testing report. 30 – 150 °C</p>	<p>采用SUS304-2B不锈钢板制造层板、底板厚为1.0mm，门外板厚1.0mm门内复板厚0.6mm，顶板厚0.8mm，侧板厚0.8mm上掀式翻门φ50不锈钢重力脚</p> <p>The SUS304 - 2B stainless steel plate was used to manufacture the φ50 stainless steel gravity foot with the thickness of floor and floor of 1.0 mm, the thickness of outer panel of 1.0 mm, the thickness of inner panel of 0.6 mm, the thickness of roof of 0.8 mm, and the thickness of side panel of 0.8 mm.</p>	<p>采用全不锈钢制作采用SUS304-2B不锈钢板制造层板厚1.0mm不锈钢板φ38mm厚度1.0mm不锈钢圆通腿配全钢可调式子弹脚</p> <p>SUS304-2B Stainless Steel Sheet Made of 1.0 mm Stainless Steel Sheet φ38 mm Thickness 1.0 mm Stainless Steel Round Leg with All Steel Adjustable Bullet</p>	<p>开放式洗地龙头；3/8x35' (11m) 软管；多导向卷盘支持安装于天花板、墙面、柜台下等"</p> <p>open washing tap ; 3 / 8x35 ' (11m) hose ; multi - guide coil support installed under ceiling, wall, counter, etc.</p>

